



## 7 X N+W Necta Zanussi Zeta








Available Machines: 7 X N+W Necta Zanussi Zeta (2024-04-26)

| Nr | Serial       | Year | Notes          | Status   |
|----|--------------|------|----------------|----------|
| 1  | 156-01355-5  | 2005 |                | Reserved |
| 2  | 156-01271-2  | 2002 | XL             | In stock |
| 3  | 156-01370-7  | 2007 |                | In stock |
| 4  | 156-01248-4  | 2004 |                | In stock |
| 5  | 156-01087-xx | 2000 | Housing damage | In stock |
| 6  | 156-01841-7  | 2007 | XL             | In stock |
| 7  | 156-01621-8  | 2008 |                | In stock |

Product Images

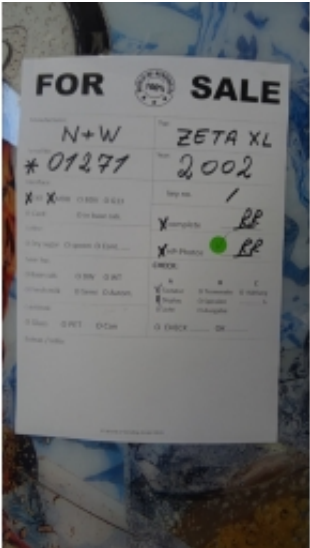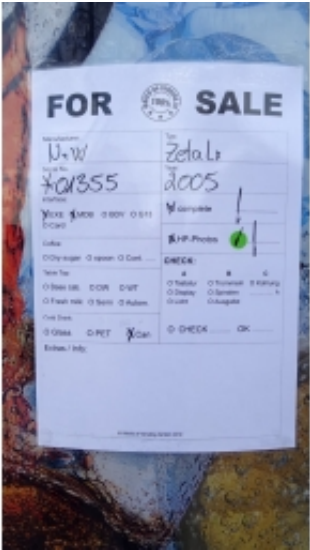

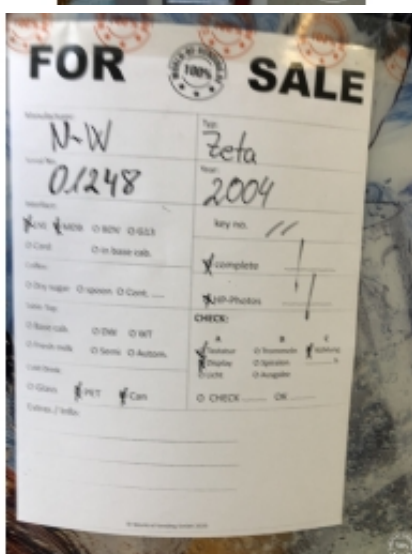





**FOR SALE**

Manufacturer: **N+W** Type: **Zeta**

Serial No.: **01087** Year: **XX**

Interface: ☒ coin ☐ MDE ☐ BDN ☐ G32 ☐ Card ☐ in base cab.

Collection: ☐ Dry vapor ☐ Upvote ☐ Cont. ☒ complete

Other top: ☐ Base cab. ☐ DM ☐ WT ☒ HP Photos

Other side: ☐ Fresh milk ☐ Semi ☐ Autom. ☒ CHECK: ☒ Tanker ☐ Transport ☐ Display ☐ Operation ☐ Lade ☐ Recharge

Other side: ☐ Glass ☐ PET ☒ Car ☐ CHECK ☐ DE

Other side: **Gehäuseschaden**



**FOR SALE**

Manufacturer: **N+W** Type: **Zeta lx**

Serial No.: **01841** Year: **2007**

Interface: ☒ coin ☐ MDE ☐ BDN ☐ G32 ☐ Card ☐ in base cab.

Collection: ☐ Dry vapor ☐ Upvote ☐ Cont. ☒ complete

Other top: ☐ Base cab. ☐ DM ☐ WT ☒ HP Photos

Other side: ☐ Fresh milk ☐ Semi ☐ Autom. ☒ CHECK: ☒ Tanker ☐ Transport ☐ Display ☐ Operation ☐ Lade ☐ Recharge

Other side: ☐ Glass ☐ PET ☒ Car ☐ CHECK ☐ DE

Other side: **Gehäuseschaden**







ZETA RANGE



TECHNOLOGY AND RESPECT FOR THE ENVIRONMENT

The use of R 134a gas in producing the cabinet insulation and in the cooling unit confirms Necta's environmental mission. The reduction of power consumption is guaranteed by the special features of the new cooling unit and by the fact that the counterdoor stays closed on the during maintenance and programming operations, avoiding any temperature loss. Furthermore, the cabinet construction ensures efficient insulation. Because of the electrical quality and safety, the Zeta range was certified by the and it also complies with the EEC directives 89/392, 89/336 and 73/23 as well as with the standards concerning the disabled.

ELECTRONICS

- Bistandard protocol EXECUTIVE - MDB/ICP
- Display of the total number of selections when closing the door
- Programming through the keypad
- Automatic set-up with Necta software for PSION and Necta's Superprogramm
- Data collection through standard RS232 or IRDA interface kit
- Remote control, via GSM technology, when in slave mode and banked next to vending machines with 16 bit electronic control, such as Zenith, Astro and Sta

SYSTEMS OF PAYMENT


Bill acceptor, cashless system and change giver coin mechanism/validator, which can be easily installed together.

ACCESSORIES



- Various setting kits for dispensing different diameter products
- Special plates for installing the commonest systems of payment
- Safety locking kit for the coin box
- Infrared data reading kit
- Transport kit for transpallets
- Wall and floor mounting kit
- Set of wheels
- RS232 interface kit
- GSM kit

| TECHNICAL DATA                  |           |
|---------------------------------|-----------|
| MODELS                          | ZETA 450/ |
| No. of selections               | 5         |
| Configurations*                 | 3D+2S     |
| Dimensions mm (HxWxD)           | 1830      |
| Depth without door              |           |
| Weight kg                       | 2         |
| Total capacity                  |           |
| Cans                            | 440       |
| Bottles                         | 220       |
| Total capacity of single module |           |
| see t                           |           |
| Voltage                         | 2         |
| Frequency                       | 5         |
| Rating                          | 7         |
| Refrigerating capacity          | 5         |
| Average energy consumption      |           |
| Stand-by, 24 hours              | 5         |

\*T=Toboggan/Se



\*Bottles in double depth if maximum ht. ≤ 246 mm



\*Bottles in double depth if maximum ht. ≤ 246 mm



**Excellent space-to-sales ratio**

**Wide range  
of vendible products**

**Cans in quadruple depth**

**Bottles in double depth**

**High standardisation  
of components common  
within the entire Zeta  
range**

**High-performance  
cooling unit**

**Ease of maintenance  
and loading**

**High-impact design**

**Maximum respect  
for the environment**



Zeta 550  
is available in a Lx version for  
banking with Zenith and StarFood

## ZETA RANGE

### Many advantages for everybody

The Zeta range represents the highest concept of flexibility and adaptability of products, which include 0.25 and 0.33 l cans in quadruple depth and 0.5 and 0.6 l bottles with diameters ranging from 62 mm up to 73 mm.

The Zeta range can also vend the most commonly used international product sizes, including 20 oz/0.6 l PET bottles and 12 oz/0.355 l cans.

As far as choice is concerned, the Zeta range satisfies the needs of many different locations as the three models (450, 550 and 750) fit all possible requirements.

#### FLEXIBILITY

As well as being equipped with three different dispensing systems (chute for cans, single and double columns for cans and bottles), the Zeta range is simple to set up and operate. This is due to the rationalisation of kits and accessories and the single mechanism for cans and bottles, and the single release mechanism for cans and bottles.

#### UTMOST SAFETY

The Zeta range is totally and very efficiently theft and vandal proof. The die-cast aluminium keypad, the tamper-proof dispensing compartment, the programmable lock and the armoured door make the machine practically "impenetrable".

#### DESIGN


Great care was taken for the door design: the rounded shape and the attractive graphics, which attract the users attention, are some features specific to the Zeta range. The door permits easy replacement of the lexan panel, which is a real advantage for advertising campaigns or for any customised advertising, simply by changing the panel.

#### EASE OF LOADING, INSTALLATION AND MAINTENANCE

The easy access to the columns, the shape of the chutes and the design of the machine make the loading operations extremely simple and natural. The door, which is located at the top, allows access to the cooling unit, fitted with a single row condenser with large surface area, which ensures a considerable increase of refrigeration performance (greater energy efficiency) and frequent problems connected with cleaning.



Quick and easy  
loading operations

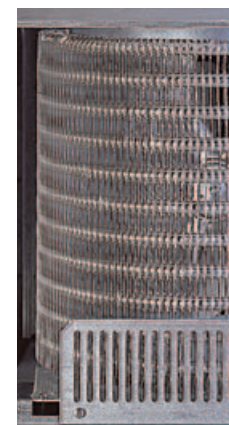

High-performance  
cooling unit